



Instructions


Subject: **FLAV'R-Pic** FRP-250 Brixing

If the merchandiser and splash panel are on the front of the unit, remove them. Merchandiser removal will give you access to the syrup and water valves. Splash panel removal will give you access to the plumbing label located on the foam front and/or in the Plumbing section of the Use & Care Manual. This label will be needed to identify valve and touch pad locations.

BRIX MODE

Mode 2 puts your Flav'R-Pic into brix mode, follow the steps below to put a board into brix mode.

1. Choose a control board, if brixing drinks for N1 (Nozzle 1) or N3 use the left control board, if brixing drinks for N4 or N6 use the right control board. Beverage dispense points are designated by a black nozzle.
2. Press the program button and hold for 3 seconds or until the LED displays 1. Press the program button again until 2 is displayed on the control board LED display.

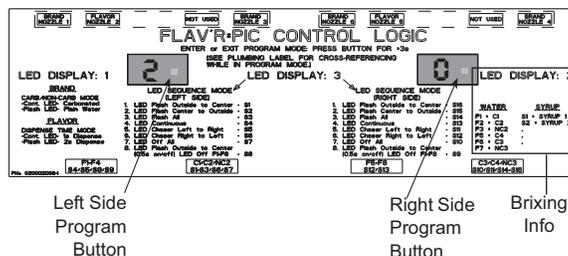

HOW TO CHECK/SET FRP BRUX

1. With the corresponding control board set to brix mode and displaying a 2 you may brix a beverage nozzle (N1, N3, N4, or N6). When brixing the syrup use of a funnel between the cup and nozzle will aid in the capture of the syrup.
2. To brix carbonated or non-carbonated water for a dispense point leave the nozzle in place and hold the brix cup with the center of the cup under the nozzle area. Non-Carbonated water is only available at N3 (Nozzle 3) and N4.
3. By referencing the control box label and plumbing diagram press the flavor shot touch pad that corresponds with the water you wish to brix. If brixing the left side it will be one of the following; F1 (Flavor Shot 1), F2, or F3. When brixing the right side F5, F6, or F7 will be used.
4. The correct volume should be 7 oz. during the fixed dispense in mode 2. If adjustment is needed to attain this volume, make adjustments corresponding valve as needed until volume is satisfactory.
5. For syrup brixing insert the funnel in the section of the brix cup that corresponds with the syrup you are brixing (refer to the brix cup label for correct High Yield Syrup Ratios). Place the cup/funnel under the nozzle area and press any brand touch pad area associated with that nozzle dispense point. For example S1 (Syrup 1), S2, S3, and S4 touch pad areas will be used to brix N1 (Nozzle 1). Syrup will dispense for a fixed duration and should be even with the 7 oz. water mark on the cup.
6. Check each syrup position and adjust syrup on the corresponding valve as necessary. A plumbing label is located on the foam front of the unit showing the position of each valve and syrup port.
See also FRP Use & Care Manual.
7. When finished, move on to another nozzle or if brixing is complete, return the control board to the dispense mode by pressing the program button and holding for 3 seconds or until the LED displays 0.
8. Replace the splash panel and merchandiser.

